


Yaskawa Mechatrolink-III serial communication control and drive perfectly combined

- Equipped with Yaskawa Mechatrolink-III tandem control and 4-axis 1kW servo drive to avoid the problem of control drive selection
- Absolute encoder reading, no need to find the origin before use
- Save electrical control wiring space, built-in I / O, VGA screen display and equipped with dual network holes
- can expand the number of axes through Yaskawa Mechatrolink-III



I / O flexible expansion supports multiple communication interfaces

- Self-provided 32I / 32O or 16I / 8O contacts, and can be connected to FC I / O modules through the new generation dedicated communication protocol SRI to meet the I / O multi-point requirements.
- Integrated drive and control with multiple communication interfaces, supporting RJ45 , RS485, usb, and SRI.

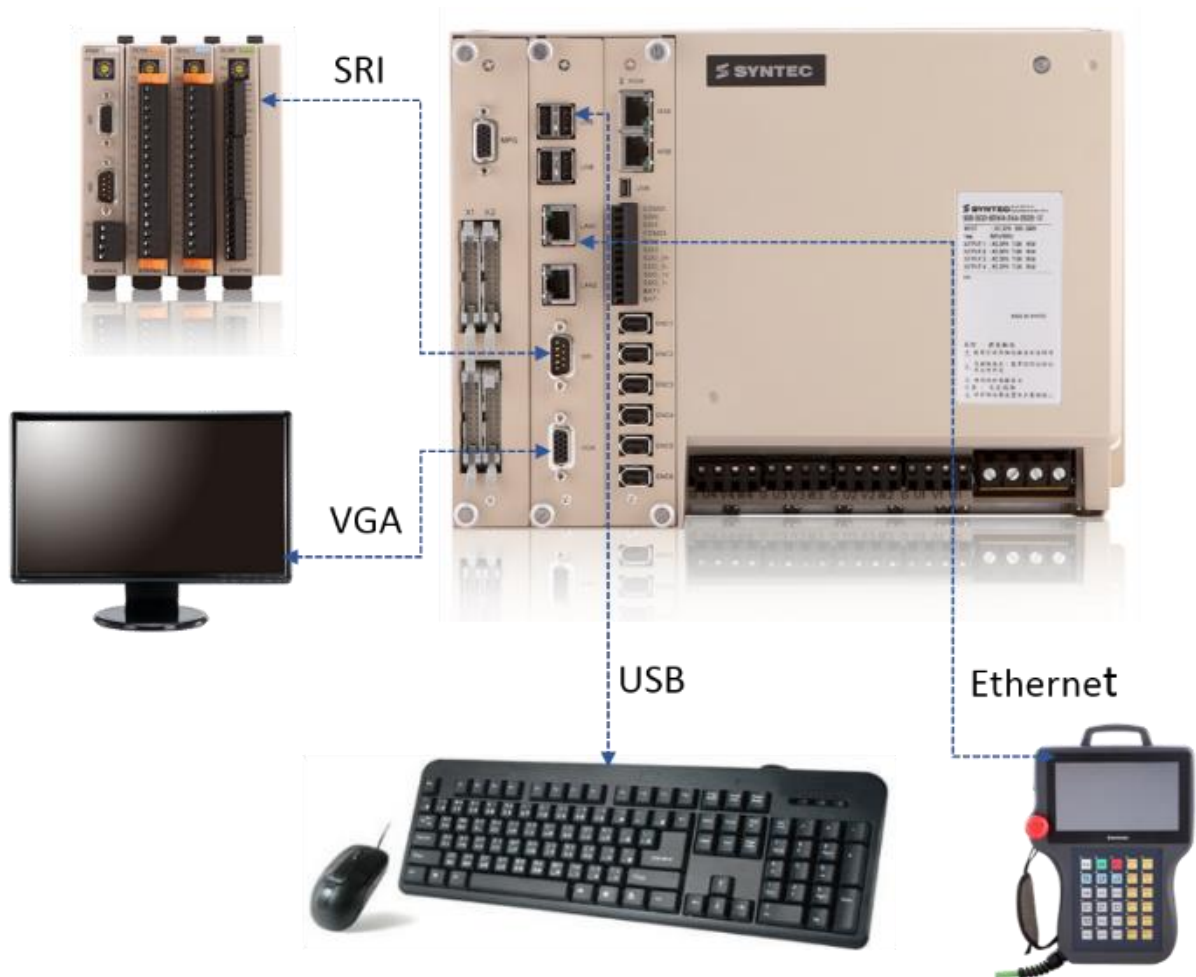

Second development platform creates differentiation

- New Generation ladder and open man-machine interface editor, download free installation
- a new generation of online support ladder diagram editing and uploading and downloading functions, easier development
- human-machine interface editor close to the Windows window to edit, add friendliness
- drag and drop Conversational components and graphics for intuitive editing



