


Newly Designed New Generation Controller

The new appearance is designed with open bus servo communication, which supports Mechatrolink 3 and Ethercat.

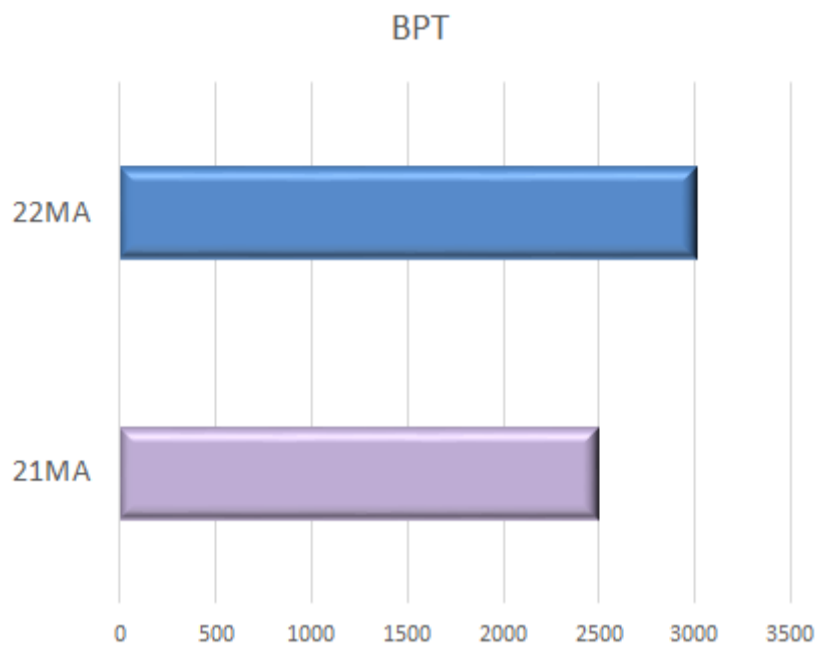

Beyond yourself, controller performance is improved

Improved CPU performance and 20% BPT performance, greatly enhancing short single-section mold and product processing capabilities

G120.1 Multiple sets of processing conditions

Nine sets of processing conditions are set, which can be freely called through G code to meet the processing requirements of different products.

